



UPLIFT LOAD, WESTERN RIB												
	span type	load type	Uplift - Total Allowable Load in psf, (span in feet)									
			3	3.5	4	4.5	5	6	7	8	9	10
29 Gage(Fy=80ksi)	single span	stress	92.5	67.9	52.0	41.1	33.3	23.1	17.0	13.0	10.3	8.3
		deflection	118.4	74.6	49.9	35.1	25.6	14.8	9.3	6.2	4.4	3.2
	2 spans	stress	108.4	79.6	61.0	48.2	39.0	27.1	19.9	15.2	12.0	9.8
		deflection	305.9	192.6	129.0	90.6	66.1	38.2	24.1	16.1	11.3	8.3
	3 spans or more	stress	126.5	93.0	71.2	56.2	45.5	31.6	23.2	17.8	14.1	11.4
		deflection	254.4	160.2	107.3	75.4	54.9	31.8	20.0	13.4	9.4	6.9
Uplift - Total Allowable Load in psf, (span in feet)												
26 Gage(Fy=80ksi)	single span	stress	166.1	122.0	93.4	73.8	59.8	41.5	30.5	23.4	18.5	14.9
		deflection	197.6	124.5	83.4	58.6	42.7	24.7	15.6	10.4	7.3	5.3
	2 spans	stress	197.4	145.1	111.1	87.7	71.1	49.4	36.3	27.8	21.9	17.8
		deflection	504.4	317.7	212.8	149.5	109.0	63.1	39.7	26.6	18.7	13.6
	3 spans or more	stress	230.4	169.3	129.6	102.4	83.0	57.6	42.3	32.4	25.6	20.7
		deflection	419.5	264.2	177.0	124.3	90.6	52.4	33.0	22.1	15.5	11.3
Uplift - Total Allowable Load in psf, (span in feet)												
24 Gage(Fy=50ksi)	single span	stress	260.8	191.6	146.7	115.9	93.9	65.2	47.9	36.7	29.0	23.5
		deflection	289.9	182.6	122.3	85.9	62.6	36.2	22.8	15.3	10.7	7.8
	2 spans	stress	290.1	213.2	163.2	128.9	104.4	72.5	53.3	40.8	32.2	26.1
		deflection	703.0	442.7	296.6	208.3	151.8	87.9	55.3	37.1	26.0	19.0
	3 spans or more	stress	338.6	248.8	190.5	150.5	121.9	84.7	62.2	47.6	37.6	30.5
		deflection	584.6	368.2	246.6	173.2	126.3	73.1	46.0	30.8	21.7	15.8
Uplift - Total Allowable Load in psf, (span in feet)												
22 Gage(Fy=50ksi)	single span	stress	365.9	268.8	205.8	162.6	131.7	91.5	67.2	51.5	40.7	32.9
		deflection	397.5	250.3	167.7	117.8	85.9	49.7	31.3	21.0	14.7	10.7
	2 spans	stress	404.7	297.3	227.6	179.9	145.7	101.2	74.3	56.9	45.0	36.4
		deflection	957.5	603.0	403.9	283.7	206.8	119.7	75.4	50.5	35.5	25.9
	3 spans or more	stress	472.3	347.0	265.7	209.9	170.0	118.1	86.7	66.4	52.5	42.5
		deflection	796.3	501.4	335.9	235.9	172.0	99.5	62.7	42.0	29.5	21.5

Section Properties			Top in Compression			Bott. in Compression		
gage	fy	wt	ix	sx	ma	ix	sx	ma
	(ksi)	(psf)	(in ⁴ /ft)	(in ³ /ft)	(kip-in)	(in ⁴ /ft)	(in ³ /ft)	(kip-in)
29	80	0.62	0.0399	0.0407	1.4635	0.0372	0.0847	1.2481
26	80	0.86	0.0658	0.0743	2.6653	0.0621	0.0624	2.2419
24	50	1.10	0.0917	0.1090	3.9168	0.0911	0.0979	3.5208
22	50	1.40	0.1249	0.1521	5.4630	0.1249	0.1375	4.9392
max. deflection		180						

UPLIFT LOAD, WESTERN RIB												
	span type	load type	Uplift - Total Allowable Load in psf, (span in feet)									
			3	3.5	4	4.5	5	6	7	8	9	10
20 Gage(Fy=40ksi)	single span	stress	328.3	241.2	184.7	145.9	118.2	82.1	60.3	46.2	36.5	29.5
		deflection	514.0	323.7	216.8	152.3	111.0	64.2	40.5	27.1	19.0	13.9
	2 spans	stress	366.5	269.2	206.1	162.9	131.9	91.6	67.3	51.5	40.7	33.0
		deflection	1238.1	779.7	522.3	366.8	267.4	154.8	97.5	65.3	45.9	33.4
	3 spans or more	stress	427.7	314.2	240.6	190.1	154.0	106.9	78.6	60.1	47.5	38.5
		deflection	1029.6	648.4	434.4	305.1	222.4	128.7	81.0	54.3	38.1	27.8

Section Properties			Top in Compression			Bott. in Compression		
gauge	fy	wt	ix	sx	ma	ix	sx	ma
	(ksi)	(psf)	(in ⁴ /ft)	(in ³ /ft)	(kip-in)	(in ⁴ /ft)	(in ³ /ft)	(kip-in)
20	40	1.65	0.1615	0.2065	4.9472	0.1615	0.1850	4.4324
max. deflection		180						

WESTERN RIB

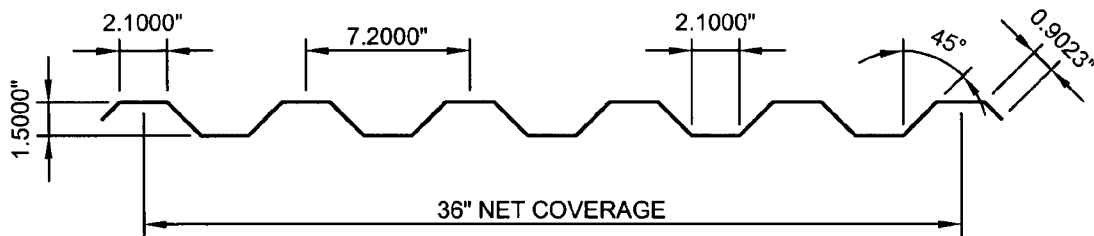
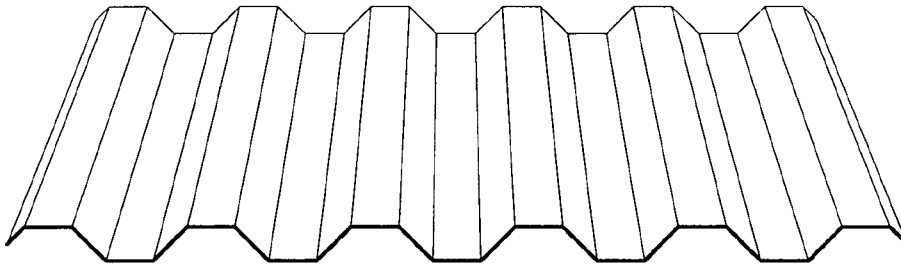


Section Properties			Top in Compression			Bott. in Compression		
gauge	fy	wt	ix	sx	ma	ix	sx	ma
	(ksi)	(psf)	(in ⁴ /ft)	(in ³ /ft)	(kip-in)	(in ⁴ /ft)	(in ³ /ft)	(kip-in)
29	80	0.62	0.0399	0.0407	1.4635	0.0372	0.0847	1.2481
26	80	0.86	0.0658	0.0743	2.6653	0.0621	0.0624	2.2419
24	50	1.10	0.0917	0.1090	3.9168	0.0911	0.0979	3.5208
22	50	1.40	0.1249	0.1521	5.4630	0.1249	0.1375	4.9392

NOTES:

1. Effective section properties are calculated in accordance with the 2004 North American Specifications for the design of Cold-Formed Steel Structural Members.
2. Ix is for the determination of deflection.
3. Sx and Ma are for the stress determination.

WESTERN RIB

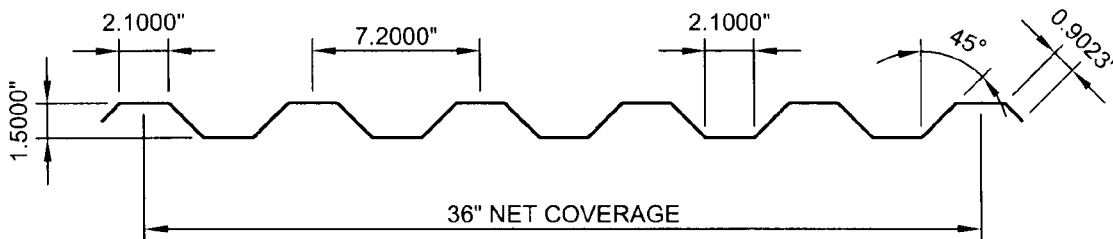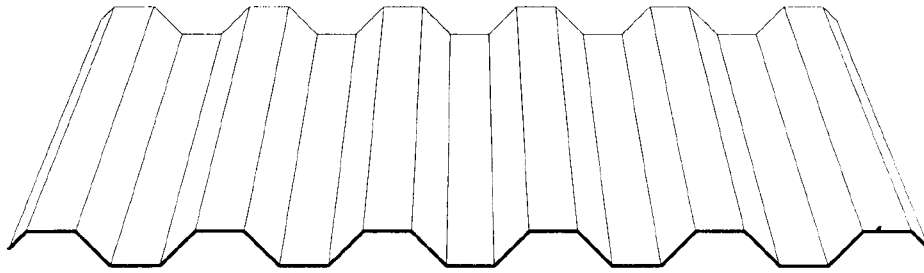

Section Properties			Top in Compression			Bott. in Compression		
gauge	fy	wt	ix	sx	ma	ix	sx	ma
	(ksi)	(psf)	(in ⁴ /ft)	(in ³ /ft)	(kip-in)	(in ⁴ /ft)	(in ³ /ft)	(kip-in)
20	40	1.65	0.1615	0.2065	4.9472	0.1615	0.1850	4.4324

NOTES:

1. Effective section properties are calculated in accordance with the 2004 North American Specifications for the design of Cold-Formed Steel Structural Members.
2. Ix is for the determination of deflection.
3. Sx and Ma are for the stress determination.